

DISPOSABLE RESPIRATORS



Respirator Head Loop / Ear Loop

IS 9473 : 2002

 CML- 7800085413



CE
 EN 149:2001+A1:2009




	FFP1		FFP2		FFP3	
	Allowable	Actual	Allowable	Actual	Allowable	Actual
Inhalation (mm of H ₂ O)	21	9	25	13	30	11
Exhalation (mm of H ₂ O)	30	14	30	8	30	12
PFE %	80	89	94	96	97	98

	FFP1		FFP2		FFP3	
	Allowable	Actual	Allowable	Actual	Allowable	Actual
Inhalation (mm of H ₂ O)	21	14	25	11	30	15
Exhalation (mm of H ₂ O)	30	17	30	13	30	14
PFE %	80	90	94	97	97	97.5

Type : FFP1 / FFP2 / FFP3 - With / Without Valve - Head Loop / Ear Loop
Protection : Solid / Liquid
Features : Light weight easy to wear, Flat Fold Style, Soft cutting edges, Adjustable elastic for proper fittings, Nose Clip securely place between the layers to prevent it from coming out during usage.

Construction of Mask Layers

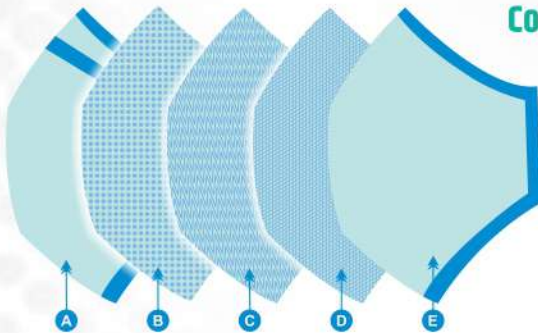

- A) Splash Proof Medical Grade PP Spun bond
- B) Meltblown Fabric
- C) Needle Punch Fabric
- D) Meltblown Fabric
- E) Water Absorbent Medical Grade PP Spun Bond Fabric

Application : Chemical, Automobile, Pharmaceuticals, Battery, Ceramics, Mines Industry